



KPN GRAPHIC

TECHNICAL DATA SHEET

vulcan® Combo Plus


Key performance

- Improved reboundability and striking absorption
- Increased flexibility, easy handling and machine set up
- Improvement of half tone reproduction and overall print quality
- Enhanced smash resistance
- Increased blanket lifetime

Main Application

Commercial Sheetfed,
Packaging (paper & cardboard)

Vulcan Combo Plus is available in 3 ply, (1.96 mm) thickness.

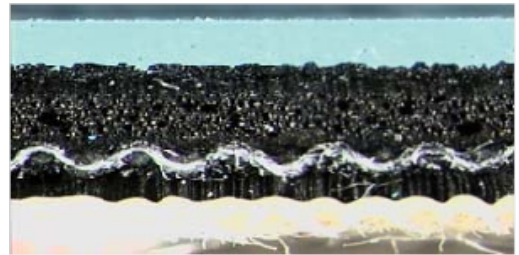

✓ The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Light Blue
THICKNESS (mm)	1.96
AVERAGE LOAD VALUE (N/cm ² @0.23mm Indentation)	250
SURFACE ROUGHNESS (Ra micron)	0.6
ELONGATION (%)	< 0.9
TENSILE STRENGTHS (N/mm)	> 60
WATER & SOLVENT PROTECTION	No

Additional Information

INK TRANSFER	Suitable for printing using both UV and conventional inks
--------------	---

