



KPN GRAPHIC

# TECHNICAL DATA SHEET

## vulcan<sup>®</sup> Zenith


### Key performance

- Very good half tone reproduction and overall printing quality
- Proper shock mark absorption
- Excellent paper smash resistance
- Low-end commercial applications

### Main Application

Commercial Sheetfed

Vulcan Zenith is available in 3 ply, 1.96 mm thickness.

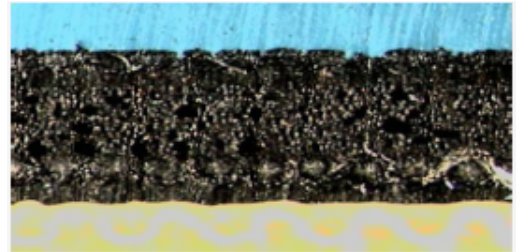

### ✓ The product at a glance

INK COMPATIBILITY	Hybrid
PRINTING SURFACE COLOUR	Blue
THICKNESS (mm)	1.96
AVERAGE LOAD VALUE (N/cm <sup>2</sup> @0.23mm Indentation)	250
SURFACE ROUGHNESS (Ra micron)	1.0
ELONGATION (%)	< 0.9
TENSILE STRENGTHS (N/mm)	> 60
WATER & SOLVENT PROTECTION	No

### Additional Information

APPLICATIONS	Suitable for commercial applications
--------------	--------------------------------------

